


ANGLES MINIMUMS ENTRE DEUX RACCORDEMENTS POUR RC-1600

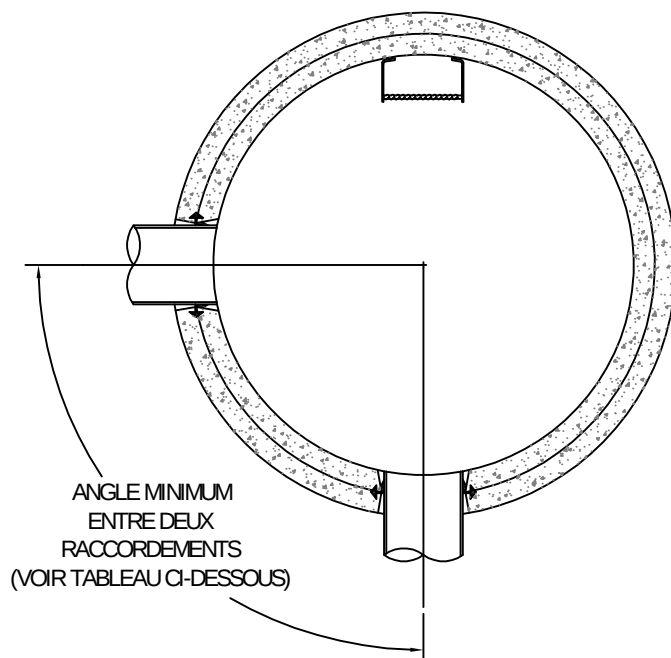

DIAM.	150	200	250	300	375	450	525	600	675	750	900
150	45°	45°	45°	45°	45°	60°	60°	60°	60°	60°	75°
200	45°	45°	45°	45°	60°	60°	60°	60°	60°	60°	75°
250	45°	45°	45°	45°	60°	60°	60°	60°	60°	75°	75°
300	45°	45°	45°	45°	60°	60°	60°	60°	75°	75°	90°
375	45°	60°	60°	60°	60°	60°	60°	75°	75°	75°	90°
450	60°	60°	60°	60°	60°	60°	75°	75°	75°	75°	90°
525	60°	60°	60°	60°	60°	75°	75°	75°	75°	90°	90°
600	60°	60°	60°	60°	75°	75°	75°	75°	90°	90°	105°
675	60°	60°	60°	75°	75°	75°	75°	90°	90°	105°	105°
750	60°	60°	75°	75°	75°	75°	90°	90°	105°	105°	120°
900	75°	75°	75°	90°	90°	90°	90°	105°	105°	120°	120°